
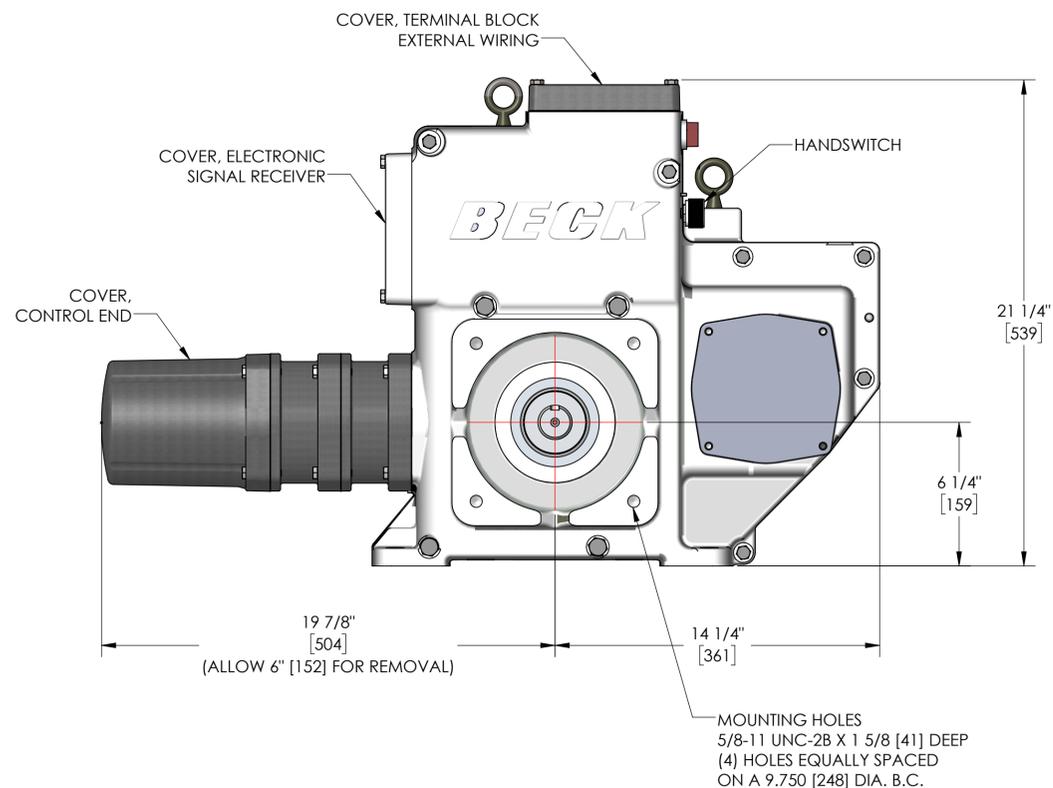
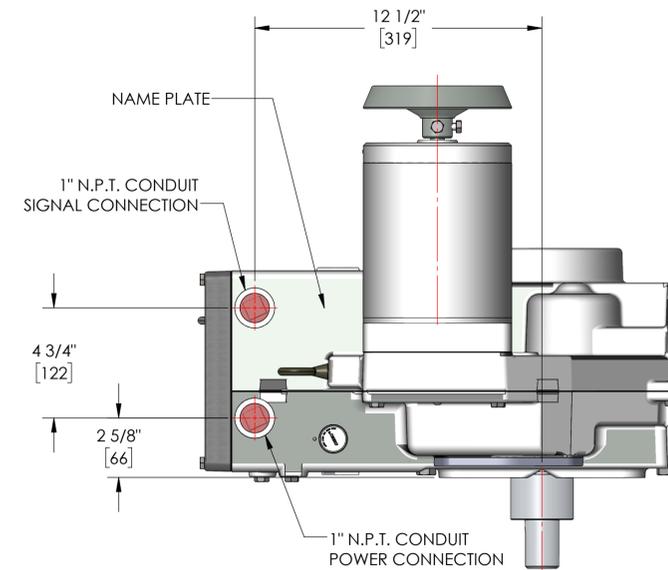


THIS DOCUMENT IS A COPY AND IS NOT THE SOURCE DOCUMENT. INFORMATION IS SUBJECT TO CHANGE WITHOUT NOTICE. THE INFORMATION CONTAINED HEREIN IS COPYRIGHTED BY HAROLD BECK AND SONS, INC. CHANGES TO THE DOCUMENT ARE PROHIBITED. CONTACT A BECK SALES ENGINEER IF A CERTIFIED DRAWING IS REQUIRED.

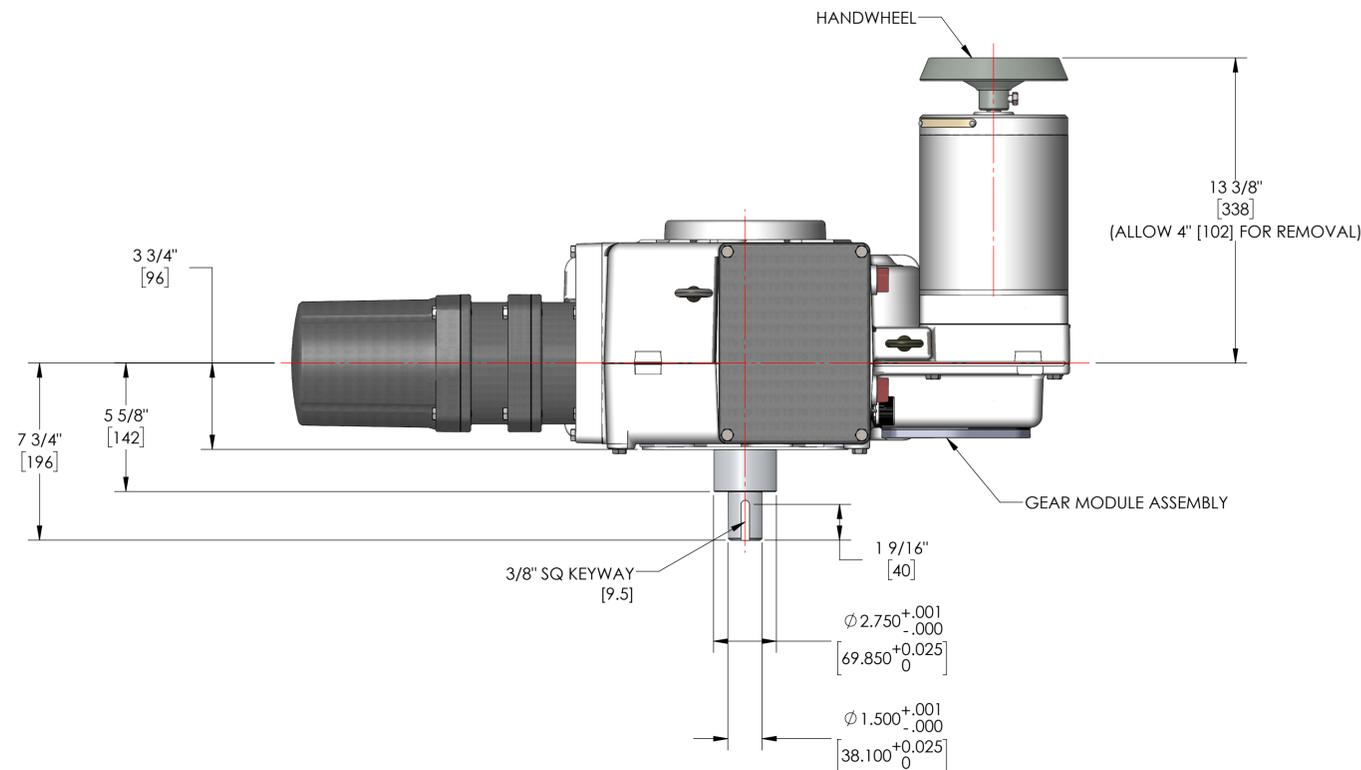

BECK DRIVE MODEL NO.	TORQUE RANGE	APPROX. WEIGHT
11-480	90 TO 120 LB.-FT. 122 TO 163 Nm	240 LBS. 109 KGS.

ALL DIMENSIONS ARE IN INCHES AND [MM] UNLESS OTHERWISE SPECIFIED. THREADS AND TAPPED HOLES ARE SPECIFIED AS UNIFIED THREAD SIZES ONLY. CONDUIT PIPE THREADS PER AMERICAN NATIONAL STANDARD TAPER PIPE THREADS (N.P.T.)

RECOMMENDED SCREW TORQUES			
	SIZE (IN.)	TORQUE (LB-FT)	TORQUE (Nm)
COVER SCREWS	5/16-18	10	14
GEAR MODULE SCREWS	5/16-18	10	14
MOTOR SCREWS	3/8-16	16	22
BODY SCREWS	3/8-16	20	27
BODY SCREWS	1/2-13	50	68
CONTROL END COVER SCREWS	5/16-18	10	14

NOTES:

ALL DIMENSIONS ARE TYPICAL. TOLERANCES: ±1/4" [6]. MOUNTING DIMENSIONS: ±1/16" [2]

IF SPECIFIC DIMENSIONS ARE REQUIRED PLEASE CONTACT A FACTORY REPRESENTATIVE.

SCREW TORQUES FOR MOUNTING HARDWARE WILL BE SUPPLIED WITH SPECIFIC VALVE MOUNTING SPECIFICATION.



18-0480-01o

HAROLD BECK & SONS INC.
NEWTOWN INDUSTRIAL COMMONS NEWTOWN, PENNSYLVANIA 18940 USA

TITLE: **OUTLINE DIMENSIONS BECK 11-480 DRIVE**

DRAWN: DLR 6/7/23	SCALE: NONE	DRAWING NO: 18-0480-01o	REV: -
CHECKED: JLK 6/9/23			
APPROVED: WWD 6/19/23	BDP 6/20/23	SHEET NO. 1 OF 1	

SIZE: **D**